



# MINI HAND DRYER

## 270


IR sensor  
Small and efficient  
3-year warranty



Mini is a slightly small, but nevertheless effective hand dryer. This model does not require much space and is therefore ideal for installation in public and commercial restrooms with low/medium traffic. The machine is reliable and almost maintenance free.

### Technical data

<b>Type</b>	<b>MINI HAND DRYER</b> Prod. No.: 270  Touch-free warm-air hand dryer with IR sensor
<b>Dimensions</b>	H: 220 mm x B: 248 mm x D: 170 mm
<b>Material</b>	2 mm die-cast aluminium
<b>Drying cycle</b>	Approx. 30 sec.
<b>Connection</b>	230 V, 50/60 Hz, Class I
<b>Total wattage</b>	1800 W
<b>Heating element</b>	1700 W
<b>Motor</b>	100 W
<b>Noise level</b>	64 dBA
<b>Max. air volume</b>	55 l/sec.
<b>Max. air capacity</b>	15,5 m/sec.
<b>Max. air outlet temperature</b>	55° C
<b>Net weight</b>	5,4 kg
<b>IP rating</b>	IP21
<b>Tender text</b>	Touch-free hand dryer with white-painted housing in 2 mm die-cast aluminium. Infra-red sensor and electronic timer, drying cycle approx. 30 sec. IP21, 230 V, 50/60 Hz, 1800 W, Class I (earthed). 64 dBA. Net weight 5.4 kg. H: 220 mm x B: 248 mm x D: 170 mm

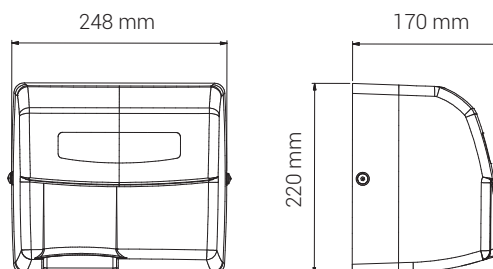

### Application

Suitable for installation in low-traffic public and commercial restrooms.

### References

Offices and administration, private homes, sports clubs, restaurants, public institutions and cultural centres.

### Standard colour

White, RAL 9003 gloss 75.

### Activation

Infrared sensor and electronic timer. Touchfree. Micro-processor activation with a 2 second delay and after 60 seconds of continuous use.

### Motor type

Brushless induction motor. 3450 revolutions/min.

### Protection

Automatic thermal cut-out in motor and heating element.

### Installation

Machine intended for wall-mounting and fixed installation via circuit-breaker. Installation must be carried out by a qualified electrician.

### Approval

