



# MOUNTING INSTRUCTIONS

## Baby Changing Mat 3236/3237 for DAN DRYER Baby Changing Stations

### Introduction:

This document serves to provide guidelines for use of the DAN DRYER Baby Changing Mat 3236/3237.

*The changing mat is fixed to the changing surface after the baby changing station has been attached to the wall.*



### Warning:

For best results follow instructions carefully.

1. Unpack the mat. Make sure four velcro pads with a protective layer are attached onto the back of the mat.  
**Do not remove the protective layer at this stage.**
2. Clean the surface of the baby changing station to remove any dirt and grease. We recommend **denatured alcohol**. **Do not use anything else, it might damage the surface.**
3. Remove the protecting paper from the 4 velcro pads.






4. Place the mat on the changing surface, with the velcro pads pointing downwards. Be careful to position the mat symmetrical.





**IMPORTANT:**

Press firmly with your thumb onto the changing mat where the velcro pads are placed for at least 30 seconds as shown on the pictures below. Firmly rub the area around the velcro pads to attach the mat securely to the surface and get the best adhesion. Make sure to repeat this step on all (4) velcro pads. This part of the process is very important to harden the glue and fasten the velcro to the surface of the table.

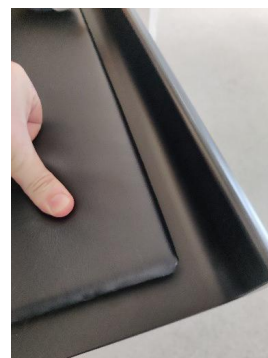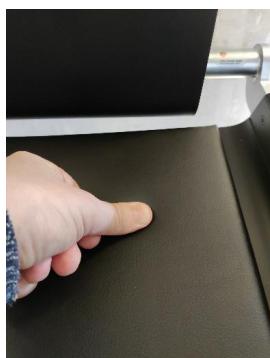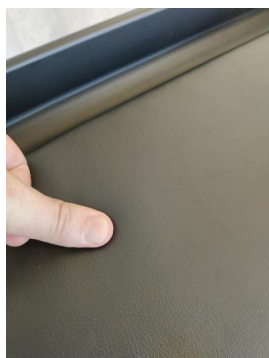

Leave the baby changing table in horizontal position and let the changing mat "rest" for approx. 15 minutes. This will let the adhesive pads 'set-up' and secure the mat from falling off.