
DIMENSIONS AND TECHNICAL SPECIFICATIONS

Dimensions

Unit of measurement: mm, (inches)

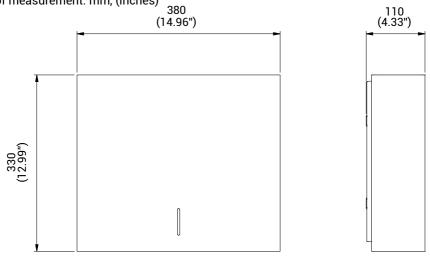

TECHNICAL SPECIFICATIONS

DESCRIPTION	DATA	
Material	Powder coated stainless steel	
Capacity	Approx. 180 pcs. 3-ply Z/W/C-folded paper towels	
Paper towels	Max 85x260 mm, (3.35" x 10.24")	
Net weight 5,1 kg, 112.44 lbs (excl. paper)		

PRODUCT TYPE / MODEL

3340	RAL 9003, white, gloss 75	
3345	RAL 9005, matt black, gloss 10	
3348	48 Optional RAL CLASSIC colours	



USER MANUAL


BJÖRK PAPER TOWEL DISPENSER Model: 3340/3345/3348 DAN DRYER A/S

Tåsingevej 2 DK - 8940 Randers SV T: +45 8641 5711 E: info@dandryer.dk W: dandryer.dk

GENERAL SAFETY INFORMATION

This product is not intended for use by persons (inclusive children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they are supervised or have been given instruction concerning use of the product by a person responsible for their safety.Children should be supervised to ensure this product is used correctly.

INSTALLATION

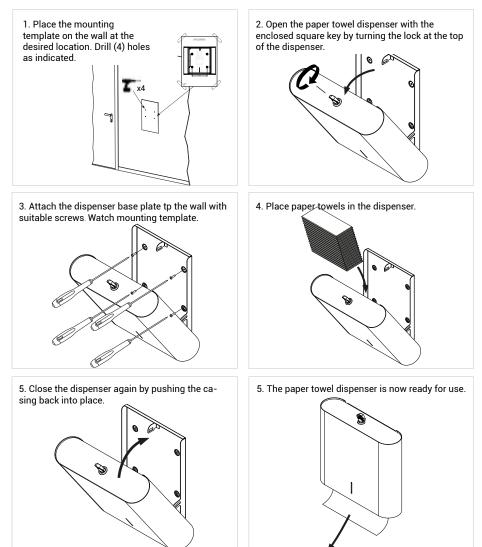

USER GUIDE


- 1. Shake excess water from hands.
- 2. Take one sheet of paper and place it onto one of your hands.
- 3. Place the back of the other hand on top of the sheet and move your hand across the paper.
- 4. Turn the same hand with the palm down against the sheet and move your hand across the paper.
- 5. Turn the sheet around and repeat section 3 and 4 with your first hand.
- 6. Repeat the process with a new sheet, if your hands are not entirely dry.

CLEANING AND MAINTENANCE


- Clean the interior of the dryer and remove any dust. If necessary, use an air compressor.
- Do not soak.
- Use a damp cloth and mild cleaning solution. Never use cleaning detergents with an abrasive effect.







COMPONENT OVERVIEW

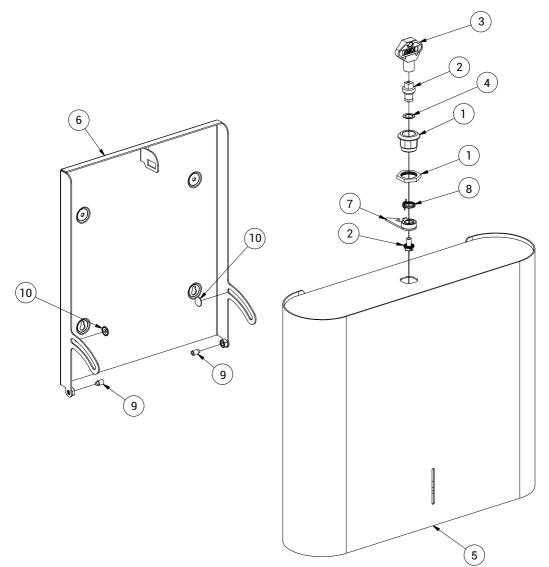

NO.	DESCRIPTION	NO.	DESCRIPTION
1	Lock with nut	6	Base plate complete
2	Insert for square key	7	Locking pawl for BJÖRK
3	Square key, black polyamide	8	Spring for lock
4	Plastic disc for lock	9	Grub screw with point M6x10
5	Casing	10	Capped Starlock Ø5